

FT-301 Segovia Fountain

Three people are recommended for the installation of this fountain!



Pump Kit Parts List

PK300 pump (1)
#5 wing nut drain stopper (1)
#7 wing nut drain stopper (1)
Approx. 12" length of 1/2" Black non-kink tubing (1) **
Approx. 2" length of 5/8" clear vinyl tubing (1) **
Approx. 2" length of 1/2" CPVC pipe (1)
Approx 16" length of 3/8" rebar (2)
Hose clamps (2)
Wedges (4)

* Hose clamps may be used as flow restrictors

**Black non-kink tubing and clear vinyl tubing have been preassembled

FOUNTAIN INFORMATION:

This fountain holds approximately 20 gallons of water.

**This fountain uses a medium fountain cover.
(FTNCOV-MED)**

**Compatible with Refill #10 Device and LED Kits
(A different style stopper may be requested for the refill kit.)**

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

**OEMPF320 - 320 GPH Pump
16 FT cord length**

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to insure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

Check out YouTube for a "How to" video.

For more Campania product information visit www.campaniainternational.com

All of our cast stone is proudly




Made in USA


FT-301 Segovia Fountain

Three people are recommended for the installation of this fountain!


Assemble your fountain on a level surface capable of holding a minimum of 899 pounds with an approximate 6 square foot footprint.

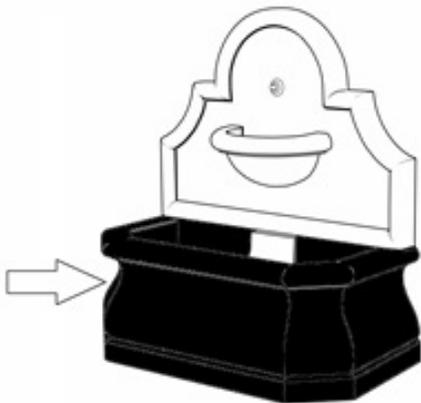

FT-301C (520 lbs)
42"L x 21"W x 16"H

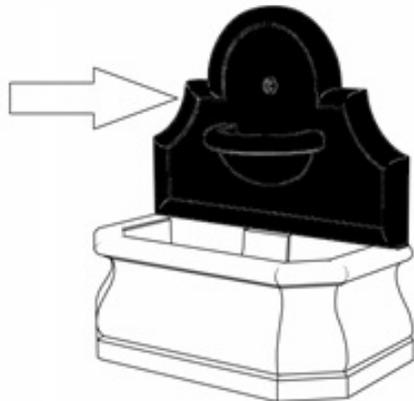

FT-301A (190 lbs)
41"L x 9.25"W x 29.5"H

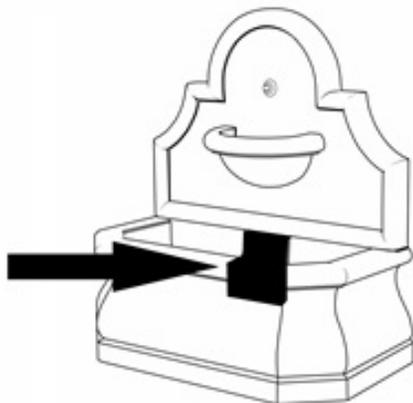

FT-301B (22lbs)
10"L x 6"W x 14.25"H

1. Place the basin (FT-301C) into position where the fountain will be installed, ensuring that it is level.
2. Assemble the pump kit.
 - a. Connect the tubing assembly to the pump by fitting the tubing over the pump water outlet.
3. Lay the pump cord over the channel at the top/back of the basin (FT-301C).
4. Place the #7 drain stopper into the hole in the bottom of the basin.
5. Place the galvanized pipes into the holes at the top 2 back corners of the basin.
6. Carefully lift the water feature (FT-301A) and place it down onto the basin so that the galvanized pipe goes into the holes at the bottom of the water feature.
 - a. Be sure not to pinch the pump cord between the water feature and the basin.
7. Insert the CPVC end of the tubing assembly into the CPVC coupling in the bottom/center of the water feature (FT-301A).
8. Place the #5 drain stopper into the bowl on the water feature.
9. Place the pump cover (FT-301B) into position over the pump and in front of the tubing assembly.
10. Fill the fountain with water.