

FT-315 Luberon Fountain

Professional installation is recommended for this fountain! Assemble your fountain on a level surface using crushed stone, gravel, or cement pad as the base.



FOUNTAIN INFORMATION:

This fountain holds approximately 130 gallons of water.

**This fountain uses a larger fountain cover but does not cover the basin.
(FTNCOV-LG)**

**Compatible with Refill #10 Device and LED kit
(A different style stopper may be requested for the refill kit.)**

Pump Kit Parts List

PK800 Pump (1)
#10 stopper
#7 drain stopper
30" length 1/2" non-kink hose (1) **
2" length 5/8" clear vinyl tubing (2) **
2" length of 3/4" clear vinyl tubing (1) **
2" piece of 1/2" CPVC pipe (1) **
Hose clamps (3)
2.8 oz tube of silicone (1)
Spiller Spout (4) **
Wedges (3)

* Hose clamps may be used as flow restrictors

**Black non-kink tubing and clear vinyl tubing have been preassembled

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

**OEMPP800 - 800 GPH Pump
16 FT cord length**

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to ensure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

Check out YouTube for a "How to" video.

For more Campania product information visit www.campaniainternational.com

All of our cast stone is proudly




Made in USA


FT-315 Luberon Fountain

Professional installation is recommended for this fountain! Assemble your fountain on a level surface using crushed stone, gravel, or cement pad as the base.


Assemble your fountain on a level surface capable of holding a minimum of 3832 pounds with an approximate 8 square foot footprint.

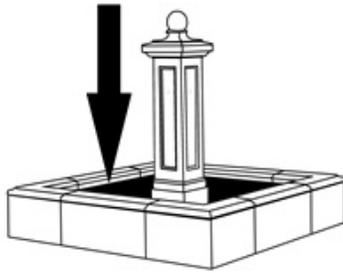


FGB-2130 (175 lbs)
84"L x 84"W x 11.25"H

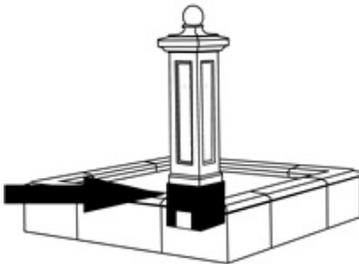

FT-315D (150 lbs)
15"L x 15"W x 15.75"H

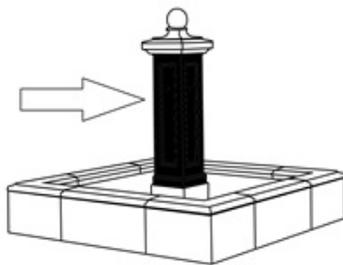

FT-315C (316 lbs)
12"L x 12"W x 38"H

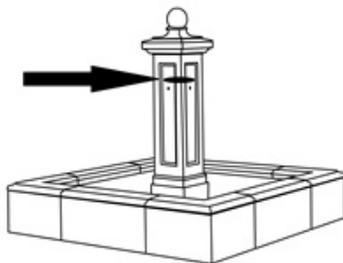


FT-277A (2 lbs)
6.75"W x 1"H

1. Place the fiberglass basin where the fountain is to be installed.
 - a. **Be sure to check that each part is level and centered during the assembly of this fountain.**
2. Assemble the pump kit
 - a. Connect the preassembled tubing to the pump by sliding the 3/4" clear tubing over the pump outlet.
 - i. **Note:** Do not use the pump adapter for this fountain
 - b. Place the stopper around the pump cord approximately 3 feet from the pump.
3. Feed the pump cord through the hole in the basin (FT-290F) and the channel.
4. **FIRMLY** press the stopper into the hole evenly.
 - a. **Note:** Using the handle of a screwdriver or hammer works best to press the stopper in place.
5. Loosely wrap cords up in the center of the basin.
6. Place the pump cover (FT-315D) over the pump, ensuring that it is centered and level.
7. Position the column (FT-315C) over the pump house (FT-315D).
8. Insert the CPVC pipe connected to the tubing into the pipe protruding out of the bottom of the column (FT-315C).
9. Center and level the column (FT-315C) on the pump house (FT-315D).
10. Place silicone around the straight end of the 4 spouts and twist each one carefully into the holes on water feature (FT-290B).
 - a. **Note:** Be sure the spout is facing down toward the basin after they are inserted.
11. Place the water control disc (FT-277A) inside of the top of the column (FT-315C).


FT-315 Luberon Fountain

Professional installation is recommended for this fountain! Assemble your fountain on a level surface using crushed stone, gravel, or cement pad as the base.

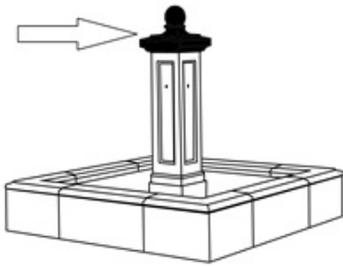


FT-315A (118 lbs)
24"L x 24"W x 11"H

12.Center the cap (FT-315A) on top of the column (FT-315C).

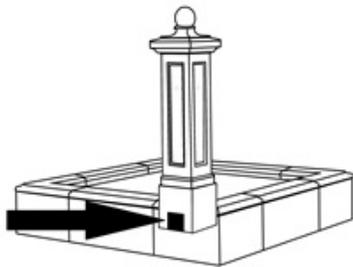


FT-315DD (6 lbs)
7"L x 2"W x 7"H

13.Insert the pump cover door (FT-315DD) into the pump cover (FT-315D).

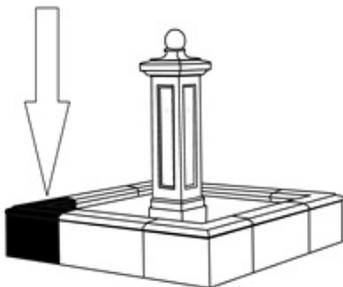

FT-315F (268 lbs)
24.25"L x 24.25"W x 15.75"H

- 14.Install the metal plug into the side of the basin.
15.Position the copings about 6 inches from the basin.
16.Carefully push each piece one at time toward the basin and into the notch of the coping starting with the 2 straight copings (FT-315E).
17.Fit each piece to the coping next to it.

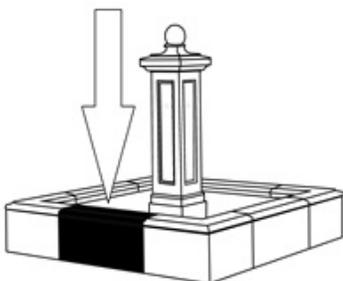

FT-315E (227 lbs)
35.5"L x 9.5"W x 15.75"H

18.Let Silicone dry for 24 hours before filling the basin with water.