

FT-195 Colonna Fountain



FOUNTAIN INFORMATION:

This fountain holds approximately 1.5 gallons of water.

**This fountain uses a small fountain cover.
(FTNCOV-SM)**

**No refill device or submersible lights are suggested for
this fountain**

Pump Kit Parts List

PK140 pump (1)
#7 stopper (1)
Approx. 6" length of 1/2" Black non-kink tubing (1)
3/8" copper elbow (1)
Hose clamps (3)

* Hose clamps may be used as flow restrictors

TOOLS REQUIRED:

Bubble Level



PUMP INFORMATION:

**PF140 - 140 GPH Pump
6 FT cord length**

- W I N T E R C A R E -

Fountain bowls/tops and other fountain components, which collect water, should not be left outside in the winter since any component, which fills with water and freezes may crack. Likewise, components such as pedestals, which remain in a basin, filled with water, which then freezes, may also crack or crumble. Ideally, therefore, a fountain should always be stored indoors or in a dry protected place such as a covered porch away from the elements. However, if a fountain must be left outside:

- (1) Remove pump, rubber stoppers, drainpipes, finials, and other small components for storage indoors. Note that stoppers or drainpipes are removed to allow drainage in the event water accumulates in any basin.
- (2) Raise fountain base from ground with wood strips so that base will not freeze to the ground surface.
- (3) Cover or wrap the fountain with burlap or other absorbent material (old blanket or towel) and then cover securely with plastic, making sure that water will not accumulate in the basin or other fountain component and freeze;
- (4) Check fountain periodically to ensure that plastic is secure and water is not accumulating in any fountain component.

- G E N E R A L F O U N T A I N T I P S -

Install fountains on a level surface. You will need a properly grounded 110-volt (AC only) GFCI protected receptacle near the fountain for your pump. All pumps are submersible and must be completely underwater to function properly. Test all pumps and adjust to full output prior to assembly. It is not recommended that fountains be placed directly on grass or dirt. Position the channel opening at the base of each fountain toward the electrical outlet to be used since the pump cord will be threaded through this opening.

Check out YouTube for a "How to" video.
For more Campania product information visit www.campaniainternational.com

All of our cast stone is proudly



Made in USA


FT-195 Colonna Fountain

Assemble your fountain on a level surface capable of holding a minimum of 150 pounds with an approximate 1.25 square foot footprint.



FT-195A (126 lbs)
18"L x 12.25"W x 30"H

1. Assemble the pump kit and stopper
 - a. Using a hose clamp, attach the end of the 1/2" non-kink tubing pump outlet.
 - b. Place the #7 stopper around the pump cord approximately 6 inches from the pump.
2. Feed the cord through the large hole in the fountain basin (FT-195A) and through the channel, which is located in the back right corner of the base.
3. **FIRMLY** press the stopper into the hole evenly.
 - a. Note: Using the handle of a screwdriver or hammer works best to press the stopper in place.
4. Connect the other end of the tubing to the pipe protruding in the bottom of the basin (FT-195A).
5. Fit the copper elbow over the copper pipe protruding at the top of the water feature (FT-195A).

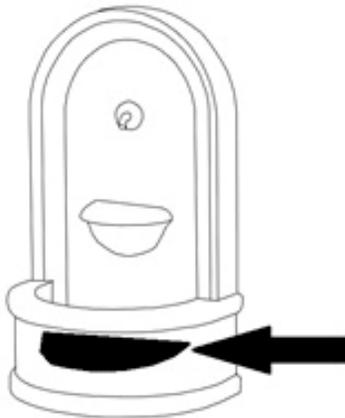

FT-195B (11 lbs)
12.5"L x 7.75"W x 0.75"H

6. Carefully lower the fountain disc (FT-195B) into the basin.
7. Fill the fountain with water.